

Your Solution
Partner In
Industrial Valve Automation...



2/2 & 3/2 WAY PNEUMATIC DIAPHRAGM OPERATED Control Valve

MODEL : CND



Mfg. & Mkt by
aira Euroautomation pvt. ltd.

INDIA

www.airaindia.com



About Us

*Clients are
why we exist!*

We welcome and thank you for referring out detailed catalogue.

aira is known all over continents as a manufacturer of quality products - Ball Valves, Butterfly Valves, Plug Valves, & Control On / Off Valves with Pneumatic Actuators for Pharma, Oil & Gas, Steel, Paper, Water, Chemical and all type of processing industries.

aira has walked through more than 3 decades, gaining valuable experience, offering equipment's in the products manufactured by OEMs in all spheres of engineering. **aira** products have gained reputations of consultants, and approvals of users, OEMs and other as a quality product.

aira has expanding business into foreign markets specially GCC, UAE, Asian & African countries. This is because increase its customer base and revenue, leading to overall growth and success. Now foreign users come to know and believe in the services provided by the **aira**. Along with the same, it also helps to reach a large number of users thereby leading to the increase their business.

Being and ISO 9001 BVQI certified company has put **aira** in fore front. Our motto is "Value the customer" and "Superior product", one among the best in the world.

Our Quality

- In- House full scale testing facility.
- Lean manufacturing practices
- Certified by : ISO 9001 : 2015 (BVQI LONDON), CE, ATEX, CIMFR, BIS, PESO, SIL 3, IBR
- API 609, API 6D

Our Commitment

- To understand customer's need first before proposing our products.
- To keep on providing competitive rate's by adapting to continuous process improvement, without compromising on quality.
- To provide continuous support to our customers and go beyond their expectations in terms of delivery and after sale services.

Our Manufacturing Facility

- In house R & D, manufacturing and testing facility is all located in a spread over three campuses at Ahmedabad, Gujarat, INDIA.

Network - Sales Office

- 60 Plus Branch Offices in different states in India.
- Sales office in the Bangladesh, Dubai, Kenya, Malaysia, Nepal, Qatar, Singapore, South Africa, Sri Lanka, Turkey, USA (Expanding).

QMS (Quality Management System)

ISO 9001 : 2015

EMS (Environment Management System)

ISO 14001 : 2015


OHSAS (Occupational Health & Safety Management System)

ISO 45001 : 2018

IBR
PISTON VALVE
GLOBE CONTROL VALVE (CKD/CND)
DISC CHECK VALVE (DCV)
PRESSURE REDUCING VALVE (PRV)
POP TYPE SAFETY VALVE
BALL VALVE


Pneumatic Actuator

CE /
ATEX /
EXIDA SIL-3 /
PROOF OF DESIGN




Scotch & Yoke Actuator

CE / ATEX / SIL-3




Stainless Steel Actuator

CE /
IEP ATEX



Positioner Enclosure


CE / CIMFR /
IP67 / BIS
/ PESO



aira's
SOME OF OUR
Certificates

Plug Valve

FUGITIVE EMISSIONS
TEST
AS PER ISO
15848-1 / IBR




Flameproof Solenoid Valve

IEP ATEX / CE / CIMFR
/ IP65/ IP67 / IP68 /
BIS / PESO




Limit Switch

IEP ATEX / CE / CIMFR
/ IP67 / BIS / PESO /
EQDC IP68



Ball Valve (Floating & Trunnion)

FIRE SAFE TEST DESIGN /
FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED / API 6D / API 607 /
EXIDA SIL-3





Butterfly Valve (centric / Double & Triple Eccentric)

FIRE SAFE TEST DESIGN /
FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED / API 609 / EXIDA SIL-3
/ IBR / PROOF OF DESIGN /
FOOD GRADE / BIS / ISI



Multiport Ball Valve

FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED / EIL

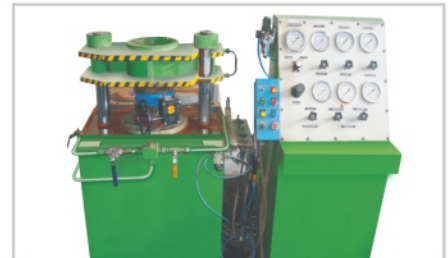


2/2 & 3/2 Way Pneumatic Diaphragm Operated High Temperature Control Valve Up to 450 °C



"aira" Offers 2/2 - 3/2 way pneumatic diaphragm operated precise Regulating design on/off valve for thermic fluid & High Temperature Application.

Size Range : 1/2" to 12" Flanged

Valve Specification	
Trim Design	Contoured Parabolic / Cage Guided / Pressure Balanced
Characteristic	Liner / Equal Percentage / ON - OFF (Quick Opening)
End Connection	Flanged end ASME B 16.5 CL 150 (300 / 600 Available On Request)
Pressure Rating	ASME B 16.5 CL 150 / 300 / 600
Temperature	Up to 450 °C Max.
Leakage	ASME B16.104 CL IV for Metal to Metal Seating / FCI - 70.2

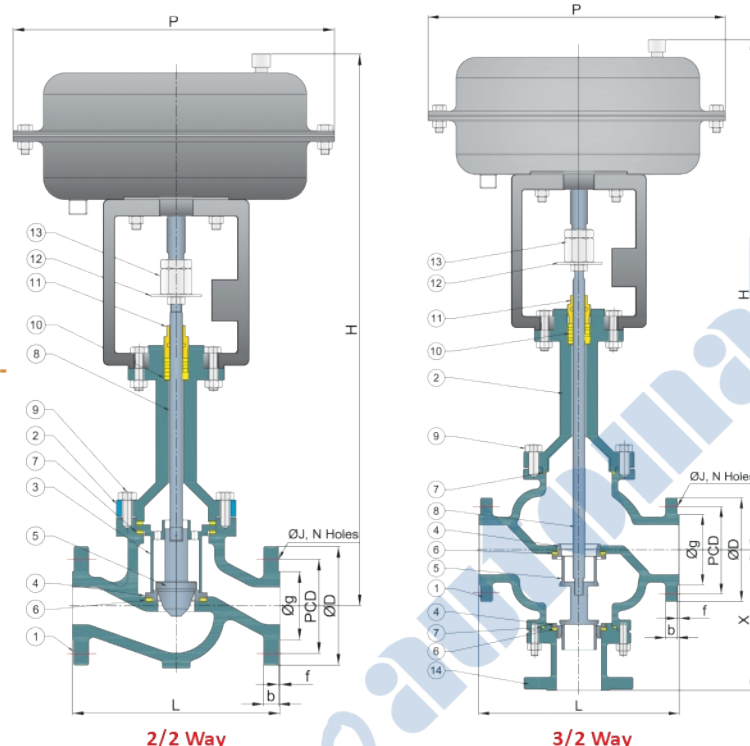

2/2 Way

3/2 Way

Sr. No.	Description	Material
1	Body	WCB / CF8 / CF8M
2	Bonnet	WCB / CF8 / CF8M
3	Cage	WCB / CF8 / CF8M
4	Seat Ring	S. S. 304 / S. S. 316
5	Plug	S. S. 304 / S. S. 316
6	Seat Gasket	S. S. 304 Spiral Wound
7	Body Gasket	S. S. 304 Spiral Wound
8	Stem	S. S. 304 / S. S. 316
9	Bolt + Washer	ASTM A193 / BH-2H
10	Stem Packing	Wire Braided Graphite
11	Gland Nut	S. S. 304 / S. S. 316
12	Travel Indicator	S. S. 202
13	Connecting Nut	S. S. 304
14	Tail Piece	WCB / CF8 / CF8M

Dimensions :

VALVE MODEL	Size		H	P	L 150#	L 300#	*X	Investment Casting Weight Approx.		Sand Casting Weight Approx.	
	MM	Inch						2 Way	3 Way	2 Way	3 Way
CND - 15	15	1/2"	425	288	184	190	145	15	18	18	22
CND - 20	20	3/4"	430	288	184	194	145	15	18	18	22
CND - 25	25	1"	455	288	184	197	145	16	20	18	22
CND - 32	32	1.1/4"	460	288	**	235	160	---	---	---	---
CND - 40	40	1.1/2"	470	288	222	235	160	19	25	24	26
CND - 50	50	2"	485	288	254	267	180	24	28	28	32
CND - 65	65	2.1/2"	665	376	276	292	205	48	55	54	58
CND - 80	80	3"	705	376	298	317	205	49	60	58	75
CND - 100	100	4"	725	376	352	368	240	60	70	95	94
CND - 150	150	6"	990	475	451	473	320	---	---	166	185
CND - 200	200	8"	1050	594	543	568	385	---	---	331	320
CND - 250	250	10"	---	---	673	708	440	---	---	372	495
CND - 300	300	12"	---	---	737	775	On Req.	---	---	401	---

* "X" Dimension only 3/2 Way Valve / ** Only 2 Way 200mm & 3 Way On Request.

(All Dimensions are in mm)



Model : CND

IBR APPROVED

High Pressure On Request.

Salient Features

- Precise Regulation with High flow capacity
- Large type of trim top operating designs for various duty conditions
- In line repairable design for easy maintenance
- Tight closure even in extreme operating conditions
- Multi action type actuator (Direct / Reverse acting)
- Wide range of actuators to meet different application

Accessories

- 3/2 Way Solenoid Valve in all Standard Coil Voltage (Flame Proof Solenoid Coil - On Request)
- Pneumatic & Electro - Pneumatic Valve Positioner
- Manual Over - Ride (Clutch Type)
- Limit Switch for On / Off Indication at Panel Board
- Filter + Regulator Combination with Pressure Gauge
- Air Lock Valve




www.airaindia.com



Note : Since, constant worldwide advancement in technology, We keep our rights reserved to make changes time to time in Technical specifications and Dimensions without prior notice.

CND Model Flange Dimensions Table

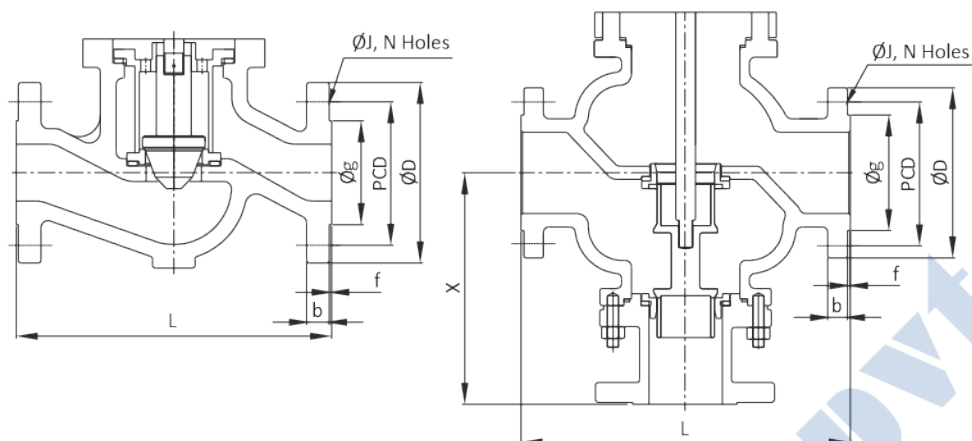

Dimensions :

VALVE MODEL	Size		150# Dimensions Table								
	MM	Inch	L	PCD	Øg	ØD	b	f	ØJ	N	*X
CND - 15	15	1/2"	184	60.3	34.9	90	8	2	15.9	4	145
CND - 20	20	3/4"	184	69.9	42.9	100	8.9	2	15.9	4	145
CND - 25	25	1"	184	79.4	50.8	110	9.6	2	15.9	4	145
CND - 32	32	1.1/4"	**	88.9	63.5	115	11.2	2	15.9	4	160
CND - 40	40	1.1/2"	222	98.4	73	125	12.7	2	15.9	4	160
CND - 50	50	2"	254	120.7	92.1	150	14.3	2	19.05	4	180
CND - 65	65	2.1/2"	276	139.7	104.8	180	15.9	2	19.05	4	205
CND - 80	80	3"	298	152.4	127	190	17.5	2	19.05	4	205
CND - 100	100	4"	352	190.5	157.2	230	22.3	2	19.05	8	240
CND - 150	150	6"	451	241.3	215.9	280	23.9	2	22.2	8	320
CND - 200	200	8"	543	298.5	269.9	345	27	2	22.2	8	385
CND - 250	250	10"	673	362	323.8	405	28.6	2	25.4	12	440
CND - 300	300	12"	737	431.8	381	485	30.2	2	25.4	12	On Req.

* "X" Dimension only 3/2 Way Valve

(All Dimensions are in mm)

** Only 2 Way 200mm & 3 Way On Request.

Dimensions :

VALVE MODEL	Size		300# Dimensions Table								
	MM	Inch	L	PCD	Øg	ØD	b	f	ØJ	N	*X
CND - 15	15	1/2"	190	66.7	34.9	95	12.7	2	15.9	4	145
CND - 20	20	3/4"	194	82.6	42.9	115	14.3	2	19.05	4	145
CND - 25	25	1"	197	88.9	50.8	125	15.9	2	19.05	4	145
CND - 32	32	1.1/4"	**	98.4	63.5	135	17.5	2	19.05	4	160
CND - 40	40	1.1/2"	235	114.3	73	155	19.1	2	22.2	4	160
CND - 50	50	2"	267	127	92.1	165	20.7	2	19.05	8	180
CND - 65	65	2.1/2"	292	149.2	104.8	190	23.9	2	22.2	8	205
CND - 80	80	3"	317	168.3	127	210	27	2	22.2	8	205
CND - 100	100	4"	368	200	157.2	255	30.2	2	22.2	8	240
CND - 150	150	6"	473	269.9	215.9	320	35	2	22.2	12	320
CND - 200	200	8"	568	330.2	269.9	380	39.7	2	25.4	12	385
CND - 250	250	10"	708	387.4	323.8	445	46.1	2	28.6	16	440
CND - 300	300	12"	775	450.8	381	520	49.3	2	31.75	16	On Req.

* "X" Dimension only 3/2 Way Valve

(All Dimensions are in mm)

** Only 2 Way 235mm & 3 Way On Request.

Pneumatic - Pneumatic & Electro Pneumatic ROTARY Valve Positioner



Electro - Pneumatic
Model AEP-1000-R

Input Signal : 4 ~ 20 mA DC
Supply Air Pressure : 20 ~ 100 psi Max.
(7.0 Kg/cm²)
Standard Stroke : 10 ~ 80 mm
Air Pipe Connection : 1/4" NPT
Ambient Temperature : -20 °C to 70 °C
Degree of Protection : IP 65
Out-put Characteristics : Rotary
Conduit Connection : 1/2" NPT
Body Material : Aluminium Die Cast



Pneumatic - Pneumatic & Electro Pneumatic LINEAR Valve Positioner



Electro - Pneumatic
Model AEP-1000-LSN

Input Signal : 3 ~ 15 (0.2 ~ 1.0 Kg/cm²)
Supply Air Pressure : 100 psi Max.
(7.0 Kg/cm²)
Standard Stroke : 10 ~ 80 mm
Air Pipe Connection : 1/4" NPT
Ambient Temperature : -20 °C to 70 °C
Degree of Protection : IP 65
Out-put Characteristics : Linear
Conduit Connection : 1/2" NPT
Body Material : Aluminium Die Cast



SMART Positioner LINEAR



Model : IP 6000 Series
Body : Aluminium
Set Point Signal : 4 - 20mA DC
Ambient Temperature : Normal Version : -20 °C ~ 70 °C
Optional Version : -40 °C ~ 70 °C
Supply Pressure : 0.14 - 0.7 MPa
Flow : 55L/min (Sup=0.14MPa)

Weatherproof MICRO Limit Switch Box



Model : MMLS-BX-WP-01-A
MMLS-BX-WP-01-B
MMLS-BX-WP-01-C
Switch : Honeywell ZM / NJ2-V3-N /
NBB-V3-Z4
Type : 1 NO + 1 NC / 2 Switch
Enclosure Protection : IP 67
Ambient Temperature : -20 °C to 80 °C
Conduit Entry : 1/2" - NPT
Terminal : 8 Point
Mounting Bracket : Namur VDI / VDE3845 / ISO 5211
Material : Aluminium Die Cast

Flameproof Limit Switch Box



Model : MLS-BX-FLP-01-A
MLS-BX-FLP-01-B
MLS-BX-FLP-01-C
MLS-BX-FLP-01-D
Switch : Honeywell V15 / Honeywell
V 15 PCB Type / NCB2-V3-NO /
NJ2-V3-N / NBB-V3-Z4 / NBB3-V3-Z4
: 1 NO + 1 NC / 2 NO + 2 NC / 2 Switch
Type : IP 68
Enclosure Protection : IP 68
Ambient Temp. : -20 °C to 80 °C
Conduit Entry : 1/2" - NPT
Terminal : 8 Point
Mounting Bracket : Namur VDI / VDE3845 / ISO 5211
Material : Aluminium Die Cast



Flameproof Limit Switch Box STAINLESS STEEL 304 / 316



Model : LS4-BX-FLP-01-A / LS6-BX-FLP-01-A
LS4-BX-FLP-01-B / LS6-BX-FLP-01-B
LS4-BX-FLP-01-C / LS6-BX-FLP-01-C
LS4-BX-FLP-01-D / LS6-BX-FLP-01-D
Switch : Honeywell V15 / Honeywell
V 15 PCB Type / NCB2-V3-NO /
NJ2-V3-N / NBB-V3-Z4 / NBB3-V3-Z4
: 1 NO + 1 NC / 2 NO + 2 NC / 2 Switch
Type : IP 67
Enclosure Protection : IP 67
Ambient Temp. : -20 °C to 80 °C
Conduit Entry : 1/2" - NPT
Terminal : 8 Point
Mounting Bracket : Namur VDI / VDE3845 / ISO 5211
Material : ASTM A351 Gr. CF8 / CF8M / CF3M



Weatherproof Limit Switch Box (Big Box)



Model : MLS-BX-01-A / MLS-BX-01-B
MLS-BX-01-C / MLS-BX-01-D
Switch : Honeywell V 15 / NJ2-V3-N /
NBB-V3-Z4 / NCB2-V3-NO
: 1 NO + 1 NC / 2 NO + 2 NC /
2 Switch
Type : IP 67
Enclosure Protection : IP 67
Ambient Temperature : -20 °C to 80 °C
Conduit Entry : 1/2" - NPT
Terminal : 8 Point
Mounting Bracket : Namur VDI / VDE3845 /
ISO 5211
Material : Aluminium Die Cast



Weatherproof Limit Switch Box STAINLESS STEEL 304 / 316



Model : MLS4-BX-01-A / MLS4-BX-01-B
MLS4-BX-01-C / MLS4-BX-01-D
Switch : Honeywell V 15 / NJ2-V3-N /
NBB-V3-Z4 / NCB2-V3-NO
: 1 NO + 1 NC / 2 NO + 2 NC /
2 Switch
Type : IP 67
Enclosure Protection : IP 67
Ambient Temperature : -20 °C to 80 °C
Conduit Entry : 1/2" - NPT
Terminal : 8 Point
Mounting Bracket : Namur VDI / VDE3845 /
ISO 5211
Material : ASTM A351 Gr. CF8 / CF8M / CF3M



3/2 Way Namur Direct Acting Solenoid Valve



Model	: NAM-SA-32
Coil Voltage	: All Std. Voltage Available
Frequency	: 50 - 60 Hz
Connection Type	: 1/4" (NPT)
Conduit	: PF 1/2"
Coil Insulation Grade	: Class "F"
Ambient Temp.	: -20 °C ~ 70 °C
MOC	: Aluminium
Seals	: NBR (Viton On Request)
Working Pressure	: Upto 0 to 10 Kg/cm ²

5/2 Way Convertible Poppet Type SINGLE & DOUBLE Namur Solenoid Valve



Model	: OTX-ALU-52 / 20TX-ALU-52
Coil Voltage	: All Std. Voltage Available
Frequency	: 50 - 60 Hz
Connection Type	: 1/4" (NPT)
Conduit	: PF 1/2"
Coil Insulation Grade	: Class "F"
Ambient Temp.	: -20 °C ~ 70 °C
MOC	: Aluminium
Seals	: NBR (Viton On Request)
Working Pressure	: Upto 2.5 to 10 Kg/cm ²

3/2 Way Internal Pilot Operated STAINLESS STEEL 316 Single Namur Solenoid Valve



Model	: MPT-S6-32
Coil Voltage	: All Std. Voltage Available
Frequency	: 50 - 60 Hz
Connection Type	: 1/4" (NPT)
Conduit	: PF 1/2"
Coil Insulation Grade	: Class "F" & "H"
Ambient Temp.	: -20 °C ~ 70 °C
MOC	: ASTM A351 Gr. CF8M
Seals	: NBR (Viton On Request)
Working Pressure	: Upto 2.5 to 10 Kg/cm ²

5/2 Way Poppet Type STAINLESS STEEL 316 Single Namur Solenoid Valve



Model	: OTX-S6-52
Coil Voltage	: All Std. Voltage Available
Frequency	: 50 - 60 Hz
Connection Type	: 1/4" (NPT)
Conduit	: PF 1/2"
Coil Insulation Grade	: Class "F" & "H"
Ambient Temp.	: -20 °C ~ 70 °C
MOC	: ASTM A351 Gr. CF8M
Seals	: NBR (Viton On Request)
Working Pressure	: Upto 2.5 to 10 Kg/cm ²

3/2 Way Midget Type Direct Acting Solenoid Valve



Model	: DMV
Size	: 1/4"
Body	: CF8 / CF8M / Brass / S.S 304
Orific	: 2
Pressure	: 7 Kg / cm ²
Temp.	: Upto -5 to 80 °C max.
Coil Rating	: Continuous Rated
Coil Insulation	: "F" Class & "H" Class For Flameproof
Media	: Air & Gas
Voltage	: 12V, 24V, 48V, 110V, 230V, AC/DC

3/2 Way Midget Type Direct Acting Solenoid Valve



Model	: MDV
Size	: 1/4"
Body	: CF8 / CF8M / Brass / S.S 304
Orific	: 2
Pressure	: 7 Kg / cm ²
Temp.	: Upto -5 to 80 °C max.
Coil Rating	: Continuous Rated
Coil Insulation	: "F" Class & "H" Class For Flameproof
Media	: Air & Gas
Voltage	: 12V, 24V, 48V, 110V, 230V, AC/DC

Filter + Regulator Air Combination



Model	: 4FQ / 8 FQ / FRJ / AFRS4
Air Connection	: 1/4"
Max. Supply Pressure	: 4FQ : 0.5 to 4 Kg / cm ² 8FQ : 0.5 to 8 Kg / cm ² FRJ : 1 to 9 Kg / cm ²
Gauge Connection	: 1/8"
Ambient Temp.	: -20 °C ~ 70 °C
Mini Filtering Size	: 5 Micron
Material	: Aluminium Pressure Die Cast / CF8 / CF8M

Air Volume Booster



Model	: VLB
Size	: 1/4" to 1"
MOC	: Aluminium
Seals	: NBR
Supply Pressure	: 10 Bar
Output Pressure	: 7 Bar
Temperature	: -20 °C ~ 70 °C

Single & Double Air Lock Valve



Model Single	: SALV
Model Double	: DALV
Size	: 1/4" to 3/4"
MOC	: Aluminium
Seals	: NBR
Supply Pressure	: 10 Bar
Output Pressure	: 7 Bar
Temperature	: -20 °C ~ 70 °C

Manual Override Clutch Type (MO)



Model	: AMO
Torque	: 200 Nm to 10000 Nm
Body	: Aluminium Pressure Die Cast / S. G. Iron
Lever Wheel	: Stainless Steel
Hand Wheel	: S.S. / M.S. (Fabricated)

Installations

- Indian Oil
- Reliance Industries Limited
- ONGC
- Hindalco
- Godrej
- Indian Railway
- Vedanta
- Voltas
- NTPC
- Gujarat State Fertilizers & Chemical Ltd.
- L & T
- Gail
- Hindustan Petroleum
- BHEL
- IFFCO
- BARC
- Thermax
- Essar

Application

- Process & Chemical
- Refineries & Petrochemicals
- Drugs & Pharmaceuticals
- Thermal Power Stations
- Dyes & Intermediates
- Breweries & Distilleries
- Steel Plants
- Onshore & Offshore Platforms
- Steel Plants
- Solvent Extraction Plants
- Sewage
- Cooling Water
- Ship Yards & Marine Management
- LPG Bottling Plants
- Water Works
- Pulp & Paper
- Fertilizers
- Textiles
- Sugar
- Nuclear & Atomic Power Stations
- Paints & Varnishes
- Soaps & Detergents
- Slurry & Ash handling
- Food & Oil Industry
- Effluent & Water Treatment

This Product is Generally made to use on the High Pressure Piping System, It is Widely Applied for Major Industrial Sectors



Ship Yards & Marine Management
Thermal Power Station
Dyes & Intermediates

Marine Tankers- Ship Building

Military Application

Foundary

Process & Chemical

Pulp & Paper Plants

Water Treatment – Purification

Food Plants

Tobacco Industries

Steel & metal Plants

Chemical and Dyeing Fluids in Textile Processing

Solvent Extraction Plants

Nuclear & Atomic Power Stations



*time tested designs with
superior performance*

GLOBAL

Network



▲ International Dealers

AUSTRALIA	MALAYSIA	VIETNAM
BAHRAIN	MEXICO	NIGERIA
BANGLADESH	NEPAL	YEMEN
BHUTAN	OMAN	ZIMBABWE
BRAZIL	PARAGUAY	
CHILE	PERU	
COLOMBIA	PHILIPPINES	
ECUADOR	QATAR	
EGYPT	RUSSIA	
FUJI	SINGAPORE	
INDONESIA	SOUTH AFRICA	
IRAN	SRI LANKA	
IRAQ	TAIWAN	
IRELAND	TANZANIA	
ITALY	TURKEY	
JORDAN	UAE	
KAZAKHISTAN	UGANDA	
KENYA	UK	
KSA	USA	
MALAWI	UZBEKISTAN	



industrial valve automation

Network

Head Office & Works
AHMEDABAD


Branch Office & Showroom

AHMEDABAD	KIM (ANKLISHWAR)
ANAND	KOLHAPUR (MAHARASHTRA)
ANDHERI	KOLKATA
ANKLISHWAR	MAHJUSAR (BARODA)
ASSAM	MEHSANA
AURANGABAD	MUMBAI
BAKROL	MUNDRA
BANGLORE	MORBI
BARODA	MUZAFFARNAGAR
BALANAGAR (HYDERABAD)	NAGPUR
BHARUCH	NOIDA
BHOPAL	PALANPUR
BHIWANDI (MAHARASHTRA)	PANIPAT
BOISAR	PANJAGUTA (HYDERABAD)
CHANGODAR	PITHAMPUR (MADHYA PRADESH)
CHENNAI	PUNE
CHHATRAL	PASHAMELARAM (HYDERABAD)
CHIPLUN (MAHARASHTRA)	RAJKOT
COIMBATORE	RAJASTHAN
DAHEJ	RAKHIAL (AHMEDABAD)
DELHI	RANICANJ (HYDERABAD)
FARIDABAD	SANAND
GANDHIDHAM	SECUNDERABAD
GHAZIABAD	SILVASSA (MAHARASHTRA)
GUWAHATI	SURAT
GWALIOR	TARAPUR
HYDERABAD	TRAJAPUR (RAJKOT)
HUBLI (KARNATAKA)	VIJAYWADA (ANDHRA PRADESH)
INDORE	UMARGAON (VAPI)
ICHALKARANJ (MAHARASHTRA)	VAPI
JAIPUR	VASAI
JODHPUR	VATVA
JHARKHAND	VIDHYANAGAR (ANAND)
KANPUR	VISHAKHAPATNAM (ANDHRA PR.)
KAKINADA (ANDHRA PRADESH)	WAGHODIYA (BARODA)

Dealers & Distributors

AMRITSAR	KOLKATA
BALOTA	LUCKNOW
BANGLORE	LUDHIANA
BELGAUM	MARWAR
BHILWARA	MEERUT
CHANDICARH	MUZAFFARNAGAR
CHENNAI	NAGPUR
COCHIN	NOIDA
COIMBATORE	PANIPAT
DELHI	PEENYA
ERODE	PUNE
FARIDABAD	TRIPUR
GHAZIABAD	VARANASI
GOA	VISAKHAPATNAM
INDORE	WADI
JALANDHAR	KANPUR
JAMSHEDPUR	KOLHAPUR
JHARKHAND	

www.airaindia.com

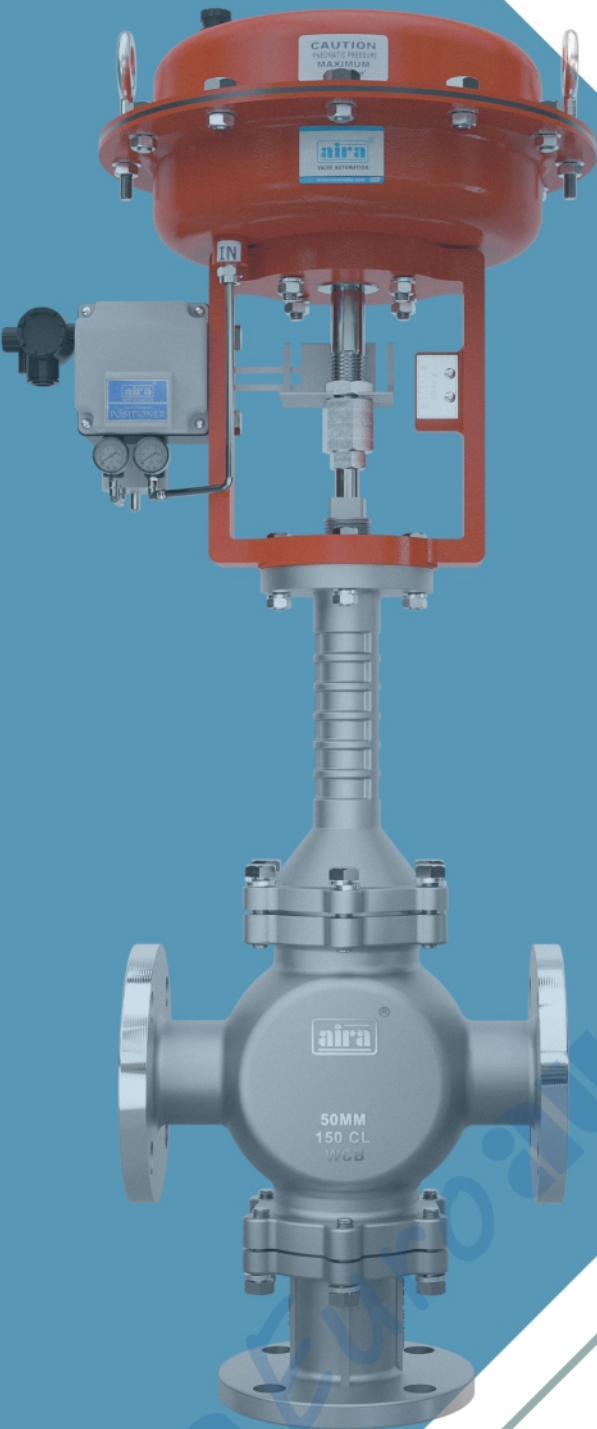

Mfg. & Mkt by
aira Euroautomation pvt. Ltd.
INDIA

www.airaindia.com