

Your Solution Partner In
Industrial Valve Automation...



Wafer Type Triple Eccentric Metal & Soft Seated **BUTTERFLY VALVE**



Mfg. & Mkt by :

aira Euroautomation pvt. ltd.
INDIA



www.airaindia.com



About Us

*Clients are
why we exist!*

We welcome and thank you for referring out detailed catalogue.

aira is known all over continents as a manufacturer of quality products - Ball Valves, Butterfly Valves, Plug Valves, & Control On / Off Valves with Pneumatic Actuators for Pharma, Oil & Gas, Steel, Paper, Water, Chemical and all type of processing industries.

aira has walked through more than 3 decades, gaining valuable experience, offering equipment's in the products manufactured by OEMs in all spheres of engineering. **aira** products have gained reputations of consultants, and approvals of users, OEMs and other as a quality product.

aira has expanding business into foreign markets specially GCC, UAE, Asian & African countries. This is because increase its customer base and revenue, leading to overall growth and success. Now foreign users come to know and believe in the services provided by the **aira**. Along with the same, it also helps to reach a large number of users thereby leading to the increase their business.

Being and ISO 9001 BVQI certified company has put **aira** in fore front. Our motto is "Value the customer" and "Superior product", one among the best in the world.

Our Quality

- In-House full scale testing facility.
- Lean manufacturing practices
- Certified by : ISO 9001 : 2015 (BVQI LONDON), CE, ATEX, CIMFR, BIS, PESO, SIL 3, IBR
- API 609, API 6D

Our Commitment

- To understand customer's need first before proposing our products.
- To keep on providing competitive rate's by adapting to continuous process improvement, without compromising on quality.
- To provide continuous support to our customers and go beyond their expectations in terms of delivery and after sale services.

Our Manufacturing Facility

- In house R & D, manufacturing and testing facility is all located in a spread over three campuses at Ahmedabad, Gujarat, INDIA.

Network - Sales Office

- 60 Plus Branch Offices in different states in India.
- Sales office in the Bangladesh, Dubai, Kenya, Malaysia, Nepal, Qatar, Singapore, South Africa, Sri Lanka, Turkey, USA (Expanding).

www.airaindia.com

QMS (Quality Management System)

ISO 9001 : 2015

EMS (Environment Management System)

ISO 14001 : 2015


OHSAS (Occupational Health & Safety Management System)

ISO 45001 : 2018

IBR
PISTON VALVE
GLOBE CONTROL VALVE (CKD/CND)
DISC CHECK VALVE (DCV)
PRESSURE REDUCING VALVE (PRV)
POP TYPE SAFETY VALVE
BALL VALVE


Pneumatic Actuator

CE /
ATEX /
EXIDA SIL-3 /
PROOF OF DESIGN




Scotch & Yoke Actuator

CE / ATEX / SIL-3




Stainless Steel Actuator

CE /
IEP ATEX



Positioner Enclosure


CE / CIMFR /
IP67 / BIS
/ PESO



aira's
SOME OF OUR
Certificates

Plug Valve

FUGITIVE EMISSIONS
TEST
AS PER ISO
15848-1 / IBR



Flameproof Solenoid Valve

IEP ATEX / CE / CIMFR
/ IP65 / IP67 / IP68 /
BIS / PESO




Limit Switch

IEP ATEX / CE / CIMFR
/ IP67 / BIS / PESO /
EQDC IP68



Ball Valve (Floating & Trunnion)

FIRE SAFE TEST DESIGN /
FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED /
EXIDA SIL-3





Butterfly Valve (centric / Double & Triple Eccentric)

FIRE SAFE TEST DESIGN /
FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED / EXIDA SIL-3
/ IBR / PROOF OF DESIGN /
FOOD GRADE / BIS / ISI



Multiport Ball Valve

FUGITIVE EMISSIONS TEST
AS PER ISO 15848-1 / CE /
PED / EIL

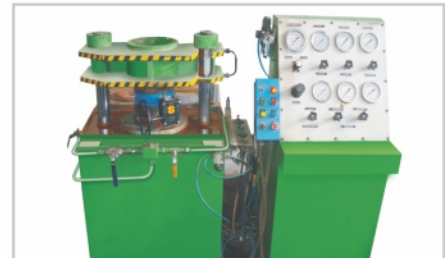

www.airaindia.com

Company Profile



www.airaindia.com



Wafer Type Triple Eccentric Butterfly Valve Metal & Soft Seated



"aira" Offers high performance triple eccentric butterfly valves are complete metal to metal seated valves suitable for both throttling and positive isolation applications. These valves are capable of bi-directional flow control, zero leakage, low fugitive emissions, steam - based applications (up to 550°C) and for cryogenic applications (down to -196°C)

Due to the triple offset sealing system, the disc moves smoothly and free of friction at all points along the specially designed body seat & disc seal. This is because the third offset completely eliminates rubbing. When the disc is closed, the seal ring (on the disc) energises the seat (on the body) There by providing a snug - tight high - performance fit.

The laminar seal is constructed with grafoil layers sandwiched between metal laminations. This resiliency of the seal flexes and energizes according to the compressive forces generated. and allows for minor body deformations due to temperature fluctuations without the risk of jamming. This provides a uniform wedging effect and ensures "Zero" leakage of the valve.


**Size Range : 1.1/2" to 48" (Above 48" On Request)
(40 MM to 1200 MM)**

Standard

- Design And Manufacturer
- Valve Face to Face Dimension
- Flange Conformity
- Inspection & Testing

- Pressure Temperature Rating
- Top Mounting Standard
- Stem Square Drive
- Leakage Class

- : API 609 Category "B" / BS EN 593
- : API 609 / BS EN 558
- : ANSI B16.5, 16.47 150# / 300# / 600#
- : FCI - 70-2 / B16.104 / ISO 5208 / BS EN 12266 - 1
- : ASME B 16.34
- : ISO 5211
- : ISO 5211
- : IV / V / VI

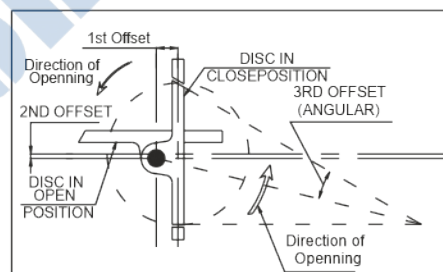

600# On Request

Pressure / Temperature Rating

Pressure Rating	150# PN 10 / PN 16 / PN 20 & 300# PN 25 / PN 40
Operating Temperature	NBR : -10 °C to +90 °C / EPDM : -10 °C to +120 °C /
	Viton : -10 °C to +220 °C / PTFE : -10 °C to +180 °C /
	RPTFE : -10 °C to +220 °C / TFM : -10 °C to +250 °C /
	S. S. 304 + Graphoil Laminated 400 °C
	S. S. 304 + Inconel 625 Graphite Laminated Above 400 °C

Accessories

- On / OFF Indicator
- NAMUR Standard Solenoid Valve in all Standard Coil Voltage (Flame Proof Solenoid Coil - On Request)
- Pneumatic & Electro-Pneumatic valve positioner
- Decutchable Manual Over - Ride
- Limit Switches for On / Off Indication at Panel Boardn Filter + Regulator Combination with Pressure Gauge
- Air Lock Valve

Cv Value 150#

Valve Size		Cv at 90 °C
MM	Inch	
80	3"	100
100	4"	219
125	5"	426
150	6"	633
200	8"	1511
250	10"	2467
300	12"	4024
350	14"	5200
400	16"	6870
500	20"	11718
600	24"	18621
700	28"	25694
750	30"	30507
800	32"	37570
900	36"	44626
1000	40"	58541
1050	42"	62536
1200	48"	81680

Valve Torque 150#

Valve Size		5 Bar	10 Bar	20 Bar
MM	Inch			
80	3"	24	28	42
100	4"	35	43	69
125	5"	55	78	115
150	6"	76	100	174
200	8"	182	198	353
250	10"	397	447	788
300	12"	590	758	1329
350	14"	510	842	1519
400	16"	754	1090	1900
500	20"	1578	2068	3703
600	24"	1485	2640	4751
700	28"	2818	4838	8779
750	30"	3148	9120	16178
800	32"	3572	9748	17947
900	36"	4922	16882	31199
1000	40"	9034	23653	43468
1050	42"	10342	25299	46711
1200	48"	13639	35789	67626

Valve Torque 300#

Valve Size		10 Bar	20 Bar	50 Bar
MM	Inch			
80	3"	41	52	89
100	4"	66	88	153
125	5"	140	193	452
150	6"	373	426	1009
200	8"	633	788	1900
250	10"	930	1329	3189
300	12"	1143	1843	4471
350	14"	1886	2791	8783
400	16"	2541	3703	9031
500	20"	3379	5827	13881
600	24"	4833	8780	21624



Tight Shut-off Leakage Class VI

We have successfully carried out proof of design test on these metal seated butterfly valve.

www.airaindia.com



Wafer Type Triple Eccentric Butterfly Valve Metal & Soft Seated

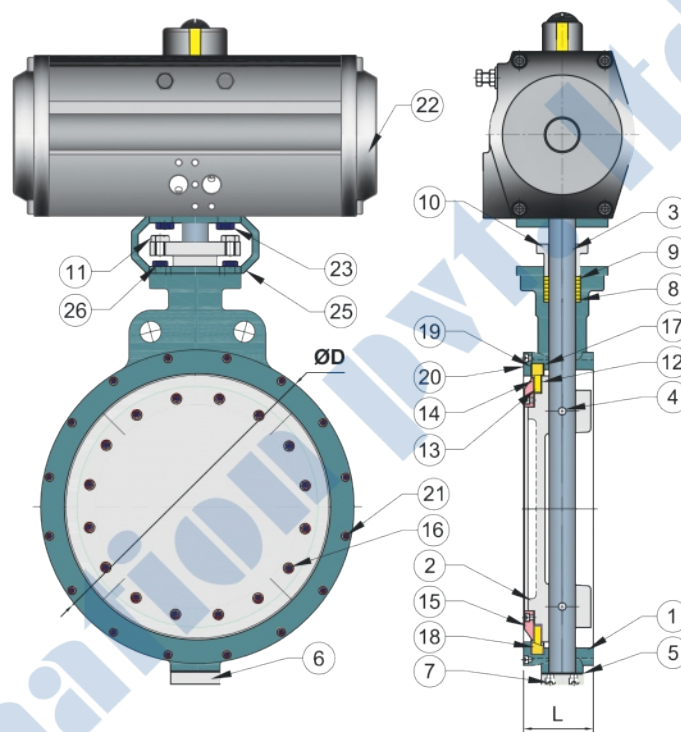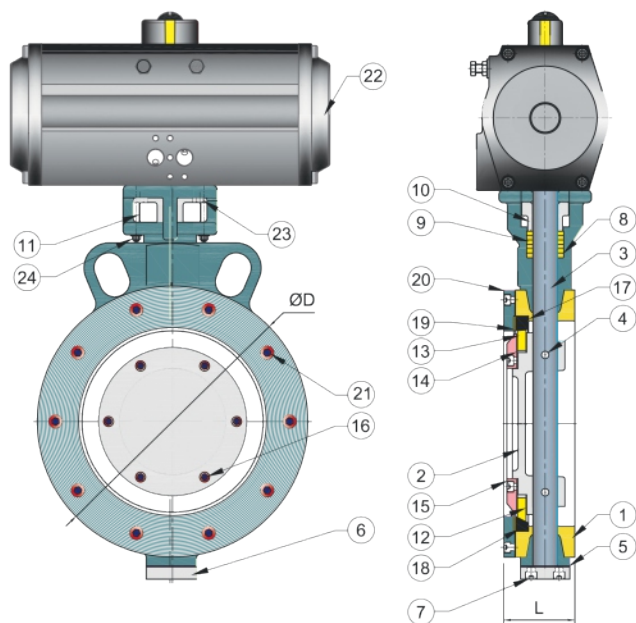

No.	Description	Material
1	Body	WCB / CF8 / CF8M / CF3M
2	Disc	WCB / CF8 / CF8M / CF3M
3	Shaft	S. S. 304 / 316 / 410 / S17-4PH / Monel / Inconel
4	Disc Pin	S. S. 304 / S. S. 316 / S. S. 410
5	Steam Square Gasket	S. S. 304 / 316 / Inconel 625 + Graphite
6	Steam Square	CF8 / CF8M / CF3M
7	L. N. Bolt Steam Square	Alloy Steel
8	Flange Side Washer	S. S. 304 / 316 / 410
9	Seal Set	Graphoil / Graphite / PTFE / EPDM
10	Gland Pata	CF8 / CF8M / CF3M
11	Hex Bolt Gland Pata	Alloy Steel
12	Disc Seal Ring Gasket	S. S. 304, S. S. 316, Inconel 625 + Graphite / Asbasetose
13	Disc Seal Ring	S. S. 304, 316 + Graphoil Laminated / NBR / EPDM / Viton / PTFE / CFT / GFT / RPTFE
14	Retainer Gasket	S. S. 304, S. S. 316, Inconel 625 + Graphite / Asbasetose
15	Retainer	CF8 / CF8M / CF3M
16	L. N. Bolt Retainer	Alloy Steel
17	Body Seat Ring Gasket	S. S. 304, S. S. 316, Inconel 625 + Graphite / Asbasetose
18	Body Seat Ring	CF8 / CF8M / CF3M
19	Body Clamping Ring Gasket	S. S. 304, S. S. 316, Inconel 625 + Graphite / Asbasetose
20	Body Clamping Ring	CF8 / CF8M / CF3M
21	L. N. Bolt Body Clamping Ring	Alloy Steel
22	Actuator	Std.
23	Hex Bolt Actuator	Alloy Steel
24	Locking Hex Bolt Nut	Alloy Steel
25	Bracket	WCB / CF8 / CF8M / CF3M
26	Hex Bolt Bracket	Alloy Steel

600# On Request

Dimensions : 150# & 300#


Valve Model	Valve Size		150#		300#		150# Weight Approx.
	MM	Inch	L	ØD	L	ØD	
TOB-40	40	1.1/2"	42	82	---	---	3.200
TOB-50	50	2"	45	95.5	45	92	4.050
TOB-65	65	2.1/2"	48	104	48	104.8	4.700
TOB-80	80	3"	48	126	48	127	5.650
TOB-100	100	4"	54	158	54	157.2	8.800
TOB-125	125	5"	57	186	59	185.7	11.100
TOB-150	150	6"	57	216	59	215.9	15.950
TOB-200	200	8"	64	270	73	269.9	24.850
TOB-250	250	10"	72	325	83	323.8	39.700
TOB-300	300	12"	81	381	92	381	58.472
TOB-350	350	14"	92	412	117	412.8	86.650
TOB-400	400	16"	102	472	133	469.9	145.750
TOB-450	450	18"	114	532	149	533.4	175.470
TOB-500	500	20"	127	584	159	584.2	294.960
TOB-600	600	24"	154	692.2	181	692.2	268.600
TOB-650	650	26"	165	749.3	On Request		313.170
TOB-700	700	28"	165	800			338.880
TOB-750	750	30"	190	857			465.610
TOB-800	800	32"	190	915			497.920
TOB-850	850	34"	205	965.2			542.420
TOB-900	900	36"	205	1022			585.060
TOB-1000	1000	40"	300	1124			846.080
TOB-1050	1050	42"	300	1194			964.300
TOB-1200	1200	48"	350	1359			1323.460

(All Dimensions are in mm)

Note : 40mm to 500mm Valve with Actuator Weight
& Above without Actuator Weight.

www.airaindia.com

Model : APP-1200-L APP-1200-R     CCEO Nagpur	"aira" Rotary / Liner Type Pneumatic - Pneumatic Valve Positioner Input Signal : 3 ~ 15psi (0.2-1.0 kgf/cm²) Supply Air Pressure : 100 psi Max. (7.0 kgf/cm²) Standard Stroke : 10 ~ 80mm Air Piping Connection : 1/4" NPT (F) Temperature : -20 °C to 70 °C Pressure Gauge : Stainless Steel Explosion-Proof : Ex 'd' II CT6 Degree of Protection : IP66 Pressure Gauge : Stainless Steel 0-2 kg/cm² 0-4 kg/cm² / 0-10 kg/cm² : Rotary Output Characteristics Linearity : Within ± 1.0% F.S. Sensitivity : Within 0.2% F.S. Hysteresis : Within 0.2% F.S. Repeatability : Within ± 0.75% F.S. Air Consumption : 5.0 LPM (1.4 kg/cm²) Supply Flow Capacity : 80 LPM (1.4 kg/cm²) Supply Material : Aluminium Die cast Body Weight : 1.8 Kg. (Approx)	Model : AEP-1000-L AEP-1000-R     CCEO Nagpur	"aira" Rotary / Liner Flameproof cum Weatherproof Electro Pneumatic Valve Positioner Input Signal : 4~20 mA DC Input Resistance : 235 ±15 Supply Air Pressure : 20 ~ 100psi (7.0 kg/cm²) Standard Stroke : 10 ~ 80mm Air Piping Connection : 1/4" NPT (F) Conduit Connection : 1/2" NPT (F) Explosion-proof : Ex 'd' II CT6 Degree of Protection : IP66 Temperature : -20 °C to 70 °C Pressure Gauge : Stainless Steel 0-2 kg/cm² 0-4 kg/cm² / 0-10 kg/cm² : Rotary Output Characteristics Linearity : Within ± 1.0% F.S. Sensitivity : Within 0.2% F.S. Hysteresis : Within 0.75% F.S. Repeatability : Within ± 0.5% F.S. Air Consumption : 5.0 LPM (1.4 kg/cm²) Supply Flow Capacity : 80 LPM (1.4 kg/cm²) Supply Material : Alluminium Die Cast Body Weight : 2.8 Kg. With a terminal box
 	"aira" Weatherproof Micro Limit Switch Box Dom Indicator Type On/Off Indicator Type : Mechanical Switch X 2 / Proximity Sensors P&F Make Model : LA4 - FLP - 01 Switch : Honeywell V15 / Honeywell V15 / NJ2-V3-N (Upto 8V) / NBB3-V3-Z4 (Upto 10 to 60 VDC) Type : 1 NO + 1 NC / 2 NO + 2 NC Switch Rating : AC 250V 3A, 125V 5A & DC 250V 0.2A, 125V 0.4A, 30V 4A Enclosure Protection : IP 67 Temperature : -20 °C ~ 80 °C Conduit Entry : NPT 1/2" (PT 1/2", PF 1/2, M20, PG 13.5) Terminal Mounting : 8 Points Bracket : Namur VDI / VDE 3845, ISO 5211 Material : Aluminum Pressure Die Cast	    CCEO Nagpur	"aira" Flameproof Limit Switch Box Type : Mechanical Switch X 2 / Proximity Sensors P&F Make Model : MLS - BX - FLP - 01 Switch : Honeywell V15 / Honeywell V15 PCB Type / NJ2-V3-N (Upto 8V) / NBB3-V3-Z4 (Upto 10 to 60 VDC) Type : 1 NO + 1 NC / 2 NO + 2 NC Switch Rating : AC 250V 3A, 125V 5A & DC 250V 0.2A, 125V 0.4A, 30V 4A Enclosure Protection : IP 67 Temperature : -20 °C ~ 80 °C Conduit Entry : NPT 1/2" (PT 1/2", PF 1/2, M20, PG 13.5) Terminal Mounting : 8 Points Bracket : Namur VDI / VDE 3845, ISO 5211 Material : Aluminum Pressure Die Cast
 	"aira" Flameproof Micro Limit Switch Box with Stainless Steel 304 / 316 Type : Mechanical Switch X 2 / Proximity Sensors P&F Make Model : LS4 - FLP-01 Switch : Honeywell V15 / Honeywell V15 PCB Type / NJ2-V3-N (Upto 8V) / NBB3-V3-Z4 (Upto 10 to 60 VDC) Type : 1 NO + 1 NC / 2 NO + 2 NC Switch Rating : AC 250V 3A, 125V 5A & DC 250V 0.2A, 125V 0.4A, 30V 4A Enclosure Protection : IP 67 Temperature : -20 °C ~ 80 °C Conduit Entry : NPT 1/2" (PT 1/2", PF 1/2, M20, PG 13.5) Terminal Mounting : 8 Points Bracket : Namur VDI / VDE 3845, ISO 5211 Material : Stainless Steel 304 / 316	  	"aira" Weatherproof Limit Switch Box Type : Mechanical Switch X 2 / Proximity Sensors P&F Make Model : MMLS - BX - WP - 01 Switch : Honeywell ZM / NJ2 - V3 - N (Upto 8 Voltage) / NBB - V3 - Z4 (Upto 10 to 60 VDC) Type : 1 NO + 1 NC Switch Rating : AC 250V 3A, 125V 5A & DC 250V 0.2A, 125V 0.4A, 30V 4A Enclosure Protection : IP 67 Temperature : -20 °C ~ 80 °C Conduit Entry : NPT 1/2" (PT 1/2", PF 1/2, M20, PG 13.5) Terminal Mounting : 8 Points Bracket : Namur VDI / VDE 3845, ISO 5211 Material : Aluminum Pressure Die Cast

	"aira" 3/2 Way Namur Direct Acting Solenoid Valve Model : NAM-SA-32 Coil Voltage : All Std. Voltage Available Frequency : 50 - 60 Hz Connection Type : 1/4" (BSP / NPT) Conduit : PF 1/2" Coil Insulation Grade : Class "F" Temperature : -20 °C ~ 70 °C (-4 ~ 158 °F) MOC : Aluminium Seals : NBR (Viton On Request) Working Pressure : Upto 8 BAR <i>This 3/2 Namur is suitable for actuator model : 5412-S / ARA-49S / ARA-50S</i>		"aira" 3/2 & 5/2 Way Convertible Poppet Type Single Namur Solenoid Valve Model : OTX - PPT - 32 / OTX - PPT - 52 Coil Voltage : All Std. Voltage Available Frequency : 50 - 60 Hz Connection Type : 1/4" (BSP / NPT) Conduit : PF 1/2" Coil Insulation Grade : Class "F" Temperature : -20 °C ~ 70 °C (-4 ~ 158 °F) MOC : Aluminium Seals : NBR (Viton On Request) Working Pressure : Upto 8 BAR
	"aira" 3/2 & 5/2 Way Convertible Poppet Type Double Namur Solenoid Valve Model : 20TX - PPT - 52 Coil Voltage : All Std. Voltage Available Frequency : 50 - 60 Hz Connection Type : 1/4" (BSP / NPT) Conduit : PF 1/2" Coil Insulation Grade : Class "F" Temperature : -20 °C ~ 70 °C (-4 ~ 158 °F) MOC : Aluminium Seals : NBR (Viton On Request) Working Pressure : Upto 8 BAR		"aira" 3/2 & 5/2 Way Convertible Spool Type Single Namur Solenoid Valve Model : AMV-NAM-220 Coil Voltage : All Std. Voltage Available Frequency : 50 - 60 Hz Connection Type : 1/4" (BSP / NPT) Conduit : PF 1/2" Coil Insulation Grade : Class "F" Temperature : -20 °C ~ 70 °C (-4 ~ 158 °F) Body Material : Aluminium Seals : NBR (Viton On Request) Working Pressure : Upto 8 BAR
	"aira" 3/2 & 5/2 Way Convertible Spool Type Double Namur Solenoid Valve Model : 2AMV-NAM-220 Coil Voltage : All Std. Voltage Available Frequency : 50 - 60 Hz Connection Type : 1/4" (BSP / NPT) Conduit : PF 1/2" Coil Insulation Grade : Class "F" Temperature : -20 °C ~ 70 °C (-4 ~ 158 °F) Body Material : Aluminium Seals : NBR (Viton On Request) Working Pressure : Upto 8 BAR		"aira" AJ Series 3/2 Way Direct Acting Solenoid Valve (Normally Open & Closed) Model : AJDS-09-202 Size : 1/4" BSP Body : Aluminum Pressure Die Cast Orifice : 2 MM Pressure : 7 Kg/cm² / 10 Kg/cm² Temp. : Upto 50 °C Leakage : Bubble Tight Frequency : 50 ~ 60 Hz Coil Insulation Grade : Class "F" Media : Air (Filtered & Lubricated) Voltage : All Std. Voltage Available
 (4FQ / 8FQ) (FRJ)	"aira" Filter + Regulator Air Combination Model : 4FQ / 8 FQ / FRJ Air Connection : 1/4" BSP Max. Supply Pressure : 4FQ: 0.5 to 4 Kg/cm² 8FQ: 0.5 to 8 Kg/cm² 1 to 9 Kg/cm² Gauge Connection : 1/8" Ambient Temperature : -20 °C ~ 120 °C (High Temp.) -40 °C ~ 120 °C (low Temp.) Mini Filtering Size : 5 Micron Material : Aluminium Pressure Die Cast		"aira" Air Volume Booster Model : VLB Size : 1/4" to 1" BSP MOC : Aluminum / S. S. 304 / 316 Seals : NBR Max. Supply Pressure : Max. 1Mpa (10 Bar) Max. Output Pressure : Max. 0.7 Mpa (7 Bar) Temperature : -20 °C ~ 70 °C (Standard) -20 °C ~ 120 °C (High) -40 °C ~ 70 °C (Low) Linearity : 1 : 1 Hysteresis : 1%
 DALV SALV	"aira" Single & Double Air Lock Valve Model : SALV / DALV Material : Aluminum / Stainless Steel 304 Max. Supply Pressure : Max. 10.2 Kg/cm² (142 PSI) Max. Single Pressure : Max. 7.1 Kg/cm² (1000 PSI) Setting Pressure Range : 1.4-7.1 Kg/cm² (20 ~ 100 PSI) Flow Capacity (Cv) : 0.9 In/Output Port Connection : 1/4" NPT Signal Port Connection : 1/4" NPT Differential Pressure : Below 0.1 Kg/cm² (1.4 PSI) Hysteresis : 1% ambient Temp. : -20 °C ~ 70 °C		"aira" Manual Override Clutch Type (MO) Model : AMO Torque : 200 Nm to 10000 Nm Body : Aluminum Pressure Die Cast / S. G. Iron Lever Wheel : Stainless Steel Hand Wheel : S. S. / M. S. (Fabricated)


Installations

- Indian Oil
- Reliance Industries Limited
- ONGC
- Hindalco
- Godrej
- Indian Railway
- Vedanta
- Voltas
- NTPC
- Gujarat State Fertilizers & Chemical Ltd.
- L & T
- Gail
- Hindustan Petroleum
- BHEL
- IFFCO
- BARC
- Thermax
- Essar

Application

- Process & Chemical
- Refineries & Petrochemicals
- Drugs & Pharmaceuticals
- Thermal Power Stations
- Dyes & Intermediates
- Breweries & Distilleries
- Steel Plants
- Onshore & Offshore Platforms
- Steel Plants
- Solvent Extraction Plants
- Sewage
- Cooling Water
- Ship Yards & Marine Management
- LPG Bottling Plants
- Water Works
- Pulp & Paper
- Fertilizers
- Textiles
- Sugar
- Nuclear & Atomic Power Stations
- Paints & Varnishes
- Soaps & Detergents
- Slurry & Ash handling
- Food & Oil Industry
- Effluent & Water Treatment

This Product is Generally made to use on the High Pressure Piping System, It is Widely Applied for Major Industrial Sectors

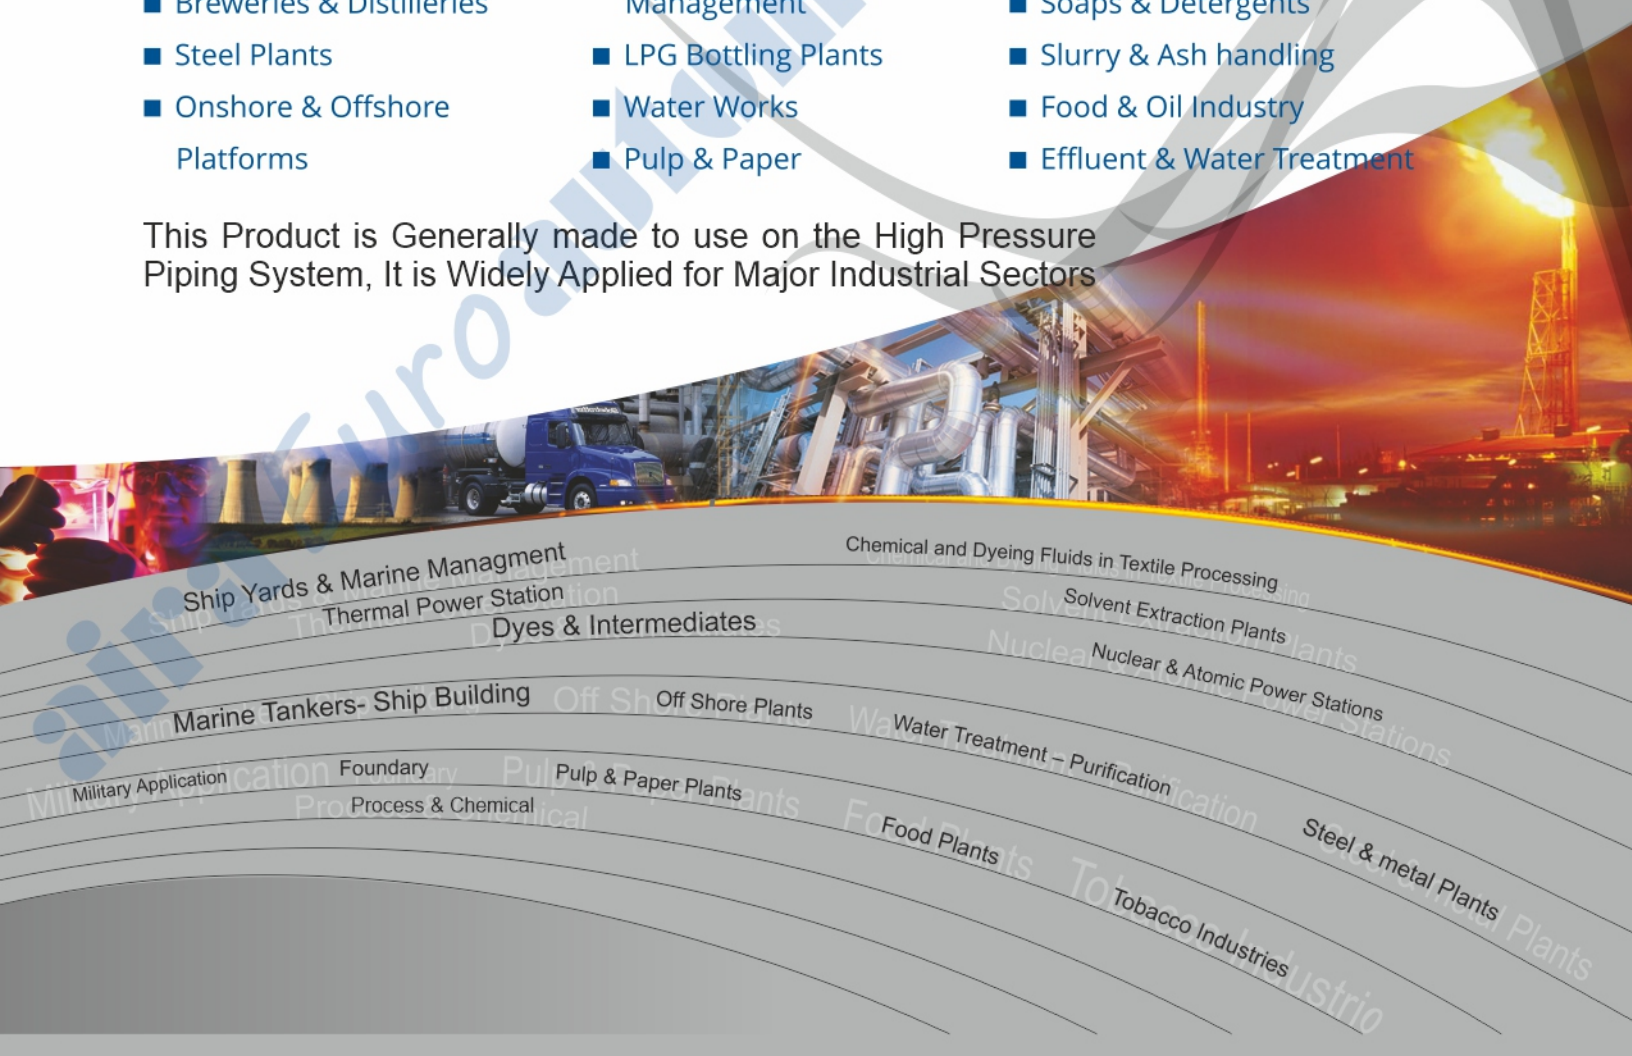

Ship Yards & Marine Management
Thermal Power Station
Dyes & Intermediates

Marine Tankers- Ship Building
Off Shore Plants

Military Application

Foundary

Process & Chemical

Pulp & Paper Plants

Chemical and Dyeing Fluids in Textile Processing

Solvent Extraction Plants

Nuclear & Atomic Power Stations

Water Treatment - Purification

Food Plants

Tobacco Industries

Steel & metal Plants



*time tested designs with
superior performance*

GLOBAL

Network



▲ International Dealers

AUSTRALIA	MALAYSIA	VIETNAM
BAHRAIN	MEXICO	NIGERIA
BANGLADESH	NEPAL	YEMEN
BHUTAN	OMAN	ZIMBABWE
BRAZIL	PARAGUAY	
CHILE	PERU	
COLOMBIA	PHILIPPINES	
ECUADOR	QATAR	
EGYPT	RUSSIA	
FUJI	SINGAPORE	
INDONESIA	SOUTH AFRICA	
IRAN	SRI LANKA	
IRAQ	TAIWAN	
IRELAND	TANZANIA	
ITALY	TURKEY	
JORDAN	UAE	
KAZAKHISTAN	UGANDA	
KENYA	UK	
KSA	USA	
MALAWI	UZBEKISTAN	



industrial valve automation

Network

Head Office & Works
AHMEDABAD

● Branch Office & Showroom

AHMEDABAD	KIM (ANKLISHWAR)
ANAND	KOLHAPUR (MAHARASHTRA)
ANDHERI	KOLKATA
ANKLISHWAR	MAHJUSAR (BARODA)
ASSAM	MEHSANA
AURANGABAD	MUMBAI
BAKROL	MUNDRA
BANGLORE	MORBI
BARODA	MUZAFFARNAGAR
BALANAGAR (HYDERABAD)	NAGPUR
BHARUCH	NOIDA
BHOPAL	PALANPUR
BHIWANDI (MAHARASHTRA)	PANIPAT
BOISAR	PANJAGUTA (HYDERABAD)
CHANGODAR	PITHAMPUR (MADHYA PRADESH)
CHENNAI	PUNE
CHHATRAL	PASHAMELARAM (HYDERABAD)
CHIPLUN (MAHARASHTRA)	RAJKOT
COIMBATORE	RAJASTHAN
DAHEJ	RAKHIAL (AHMEDABAD)
DELHI	RANIGANJ (HYDERABAD)
FARIDABAD	SANAND
GANDHIDHAM	SECUNDERABAD
GHAZIABAD	SILVASSA (MAHARASHTRA)
GUWAHATI	SURAT
GWALIOR	TARAPUR
HYDERABAD	TRAJAPUR (RAJKOT)
HUBLI (KARNATAKA)	VIJAYWADA (ANDHRA PRADESH)
INDORE	UMARGAON (VAPI)
ICHALKARANJ (MAHARASHTRA)	VAPI
JAIPUR	VASAI
JODHPUR	VATVA
JHARKHAND	VIDHYANAGAR (ANAND)
KANPUR	VISHAKHAPATNAM (ANDHRA PR.)
KAKINADA (ANDHRA PRADESH)	WAGHODIYA (BARODA)

● Dealers & Distributors

AMRITSAR	KOLKATA
BALOTA	LUCKNOW
BANGLORE	LUDHIANA
BELGAUM	MARWAR
BHILWARA	MEERUT
CHANDICARH	MUZAFFARNAGAR
CHENNAI	NAGPUR
COCHIN	NOIDA
COIMBATORE	PANIPAT
DELHI	PEENYA
ERODE	PUNE
FARIDABAD	TRIPUR
GHAZIABAD	VARANASI
GOA	VISAKHAPATNAM
INDORE	WADI
JALANDHAR	KANPUR
JAMSHEDPUR	KOLHAPUR
JHARKHAND	

www.airaindia.com

Mfg. & Mkt by :
aira Euroautomation pvt. ltd.
INDIA

Available At :